



Cylindrical Valves SCP Series

are ideally suited for Shut-off, Flow Control and Throttling of corrosive, abrasive or even toxic process media in either liquid or gaseous state.

Modular Design

Cylindrical Valves SCP Series are available as DIN- or ANSI-Valves, with handle for manual operation as per standard.

The sturdy design bodies are made of cast steel 1.0619 (WCB), coating RAL 5005 signal-blue or stainless steel casting 1.4408 (CF-8M), with resistant linings such as PFA or PFA-AS (anti-static).



Main Features

- Heavy-duty, robust construction, maintenance-free
- Bubble-tight shut-off throughout the full pressure and temperature range
- Cavity-free design, max. permeation protection
- Zero stem leakage provided by an innovative stem sealing mechanism
- Consistent low operating torque through cylindrical plug design and resilient liner/cylinder contact
- Maximum flow rates at lowest pressure drops
- Easy replacement of components on site
- Flanges acc. to DIN PN10/16 resp. ANSI 150lbs for installation into existing piping systems


CE Conformity according to European Pressure Equipment Directive 97/23/EC (PED)

Operating Options



Standard Valve

Body 1.0619 (WCB)/PFA, bare shaft

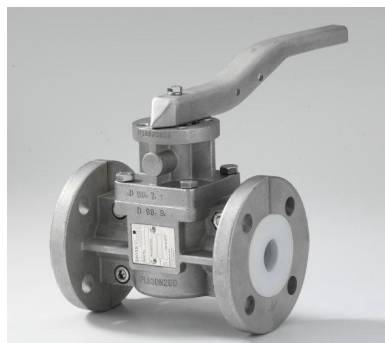

Stainless Steel

Body CF-8M/PFA, with handlever




Operating Conditions

- Temperature range from -40°C up to $+200^{\circ}\text{C}$ (depending on material of liner resp. encapsulation)
- Pressure range from 1 mbar up to 16 bar

Testing / Marking

- Pressure- and tightness testing acc. to EN 12266-1, leakage rate A, and spark testing at 35 kV to assure lining integrity. Marking of valves on body and name plate acc. to EN 19.
- Material- resp. test certificate acc. to EN 10204-3.1

Outline Drawing / Actuator Options

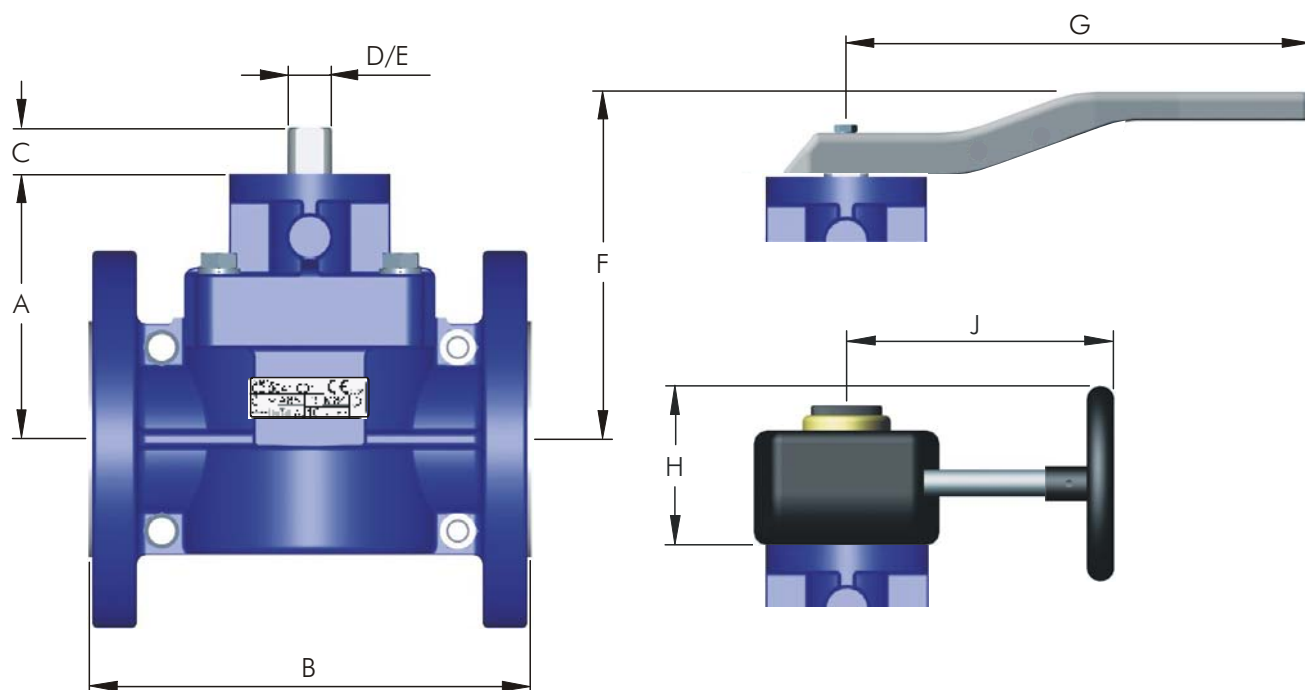

Dimensions in mm (lbs = kg x 2.2)


Size DN	A	B DIN	B ANSI	C	D Dia.	E DD	F	G	H	J	ISO	kg Valve	kg Handle	kg Gear
15/1/2"	86	130	130	19	14	11	129	230	78	126	F05	3.2	0.5	2.3
20/3/4"	89	150	150	19	14	11	132	230	78	126	F05	3.8	0.5	2.3
25/1"	92	160	127	19	14	11	135	230	78	126	F05	4.4	0.5	2.3
40/1 1/2"	102	200	165	19	18	14	150	270	78	126	F05	7.3	0.8	2.3
50/2"	107	230	178	19	18	14	155	270	78	126	F05	9.9	0.8	2.3
80	137	310	-	24	24	17	190	325	96	185	F07	22.8	1.0	2.5
3" red.	107	-	203	19	18	14	155	270	78	126	F05	13.8	0.8	2.3
100	147	350	-	24	24	17	200	325	96	185	F07	31.8	1.0	2.5
4" red.	137	-	229	24	24	17	190	325	96	185	F07	22.9	1.0	2.5
6" red.	147	-	267	24	24	17	200	325	96	185	F07	35.0	1.0	2.5

Face to face B acc. to DIN EN 558-1 range 1 resp. ASME B16.10


Size 3", 4" and 6" with reduced port to 50, 80 resp. 100 mm



Construction of Valve

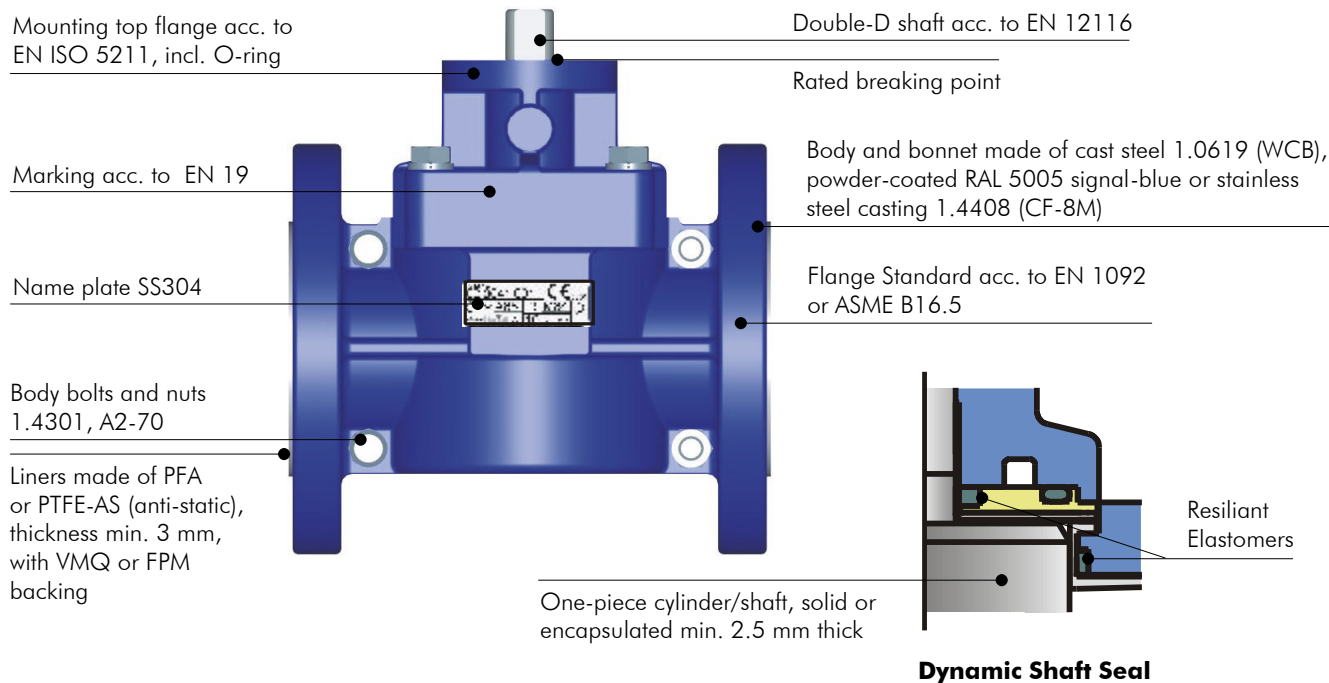


Mounting Options

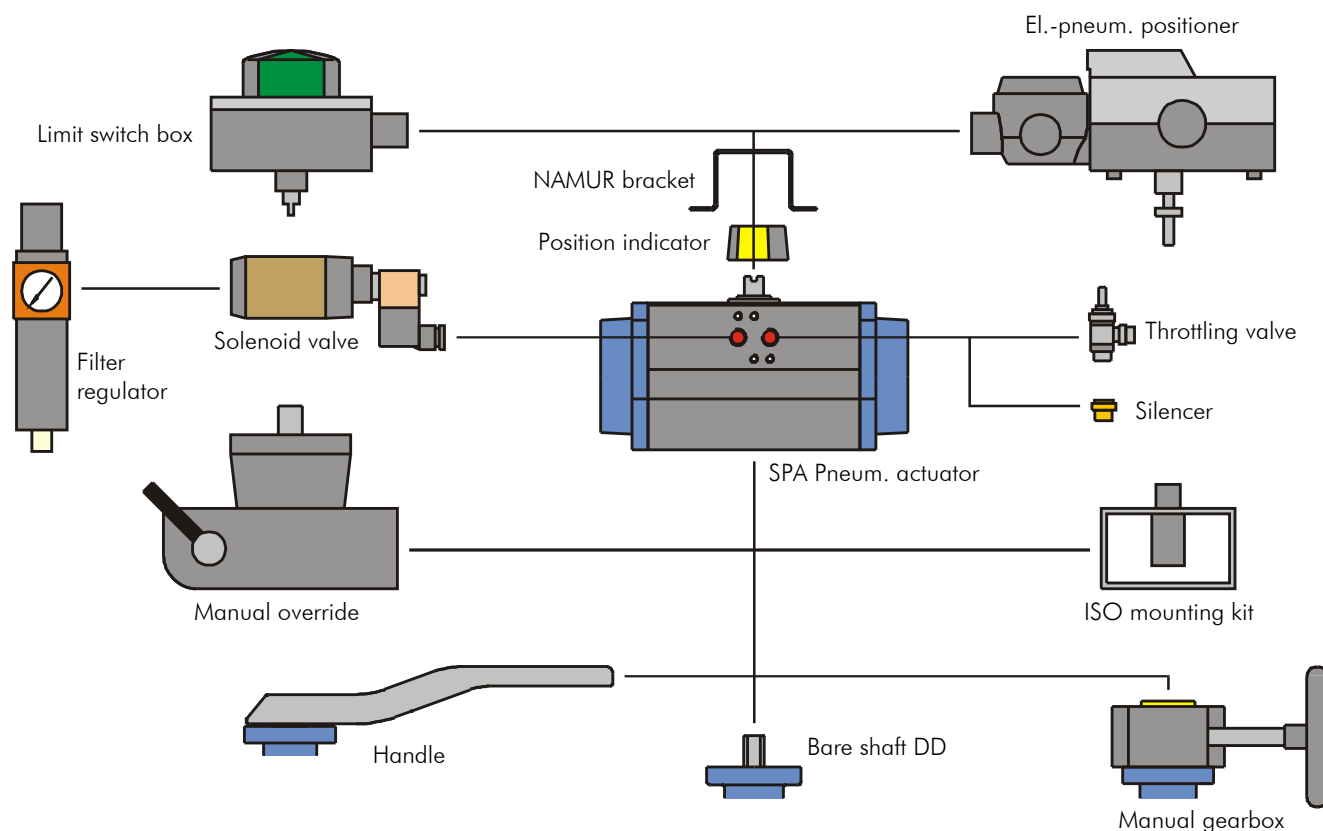

Pressure-/Temperature Diagram**PS max.**

bar

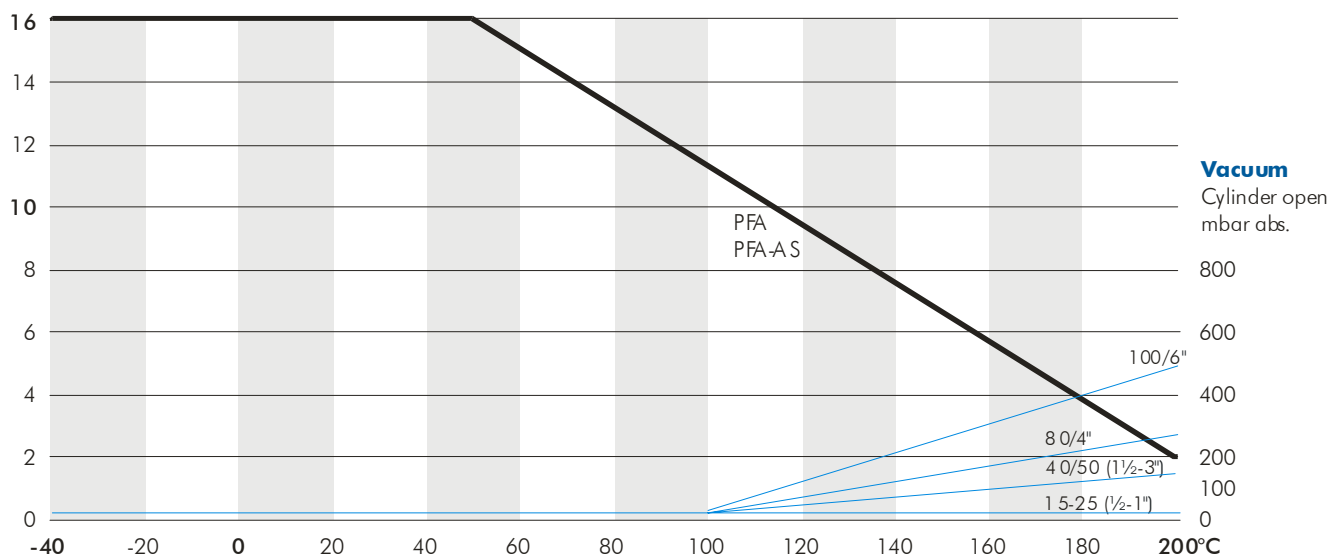**Torque Values** in Nm (in-lbs = Nm x 8.85)

Torque values for PFA-encapsulated cylinder and PFA-liner

Size DN	15/1/2"	20/3/4"	25/1"	40/1 1/2"	50/2"/3"	80/4"	100/6"
Torque nom.	16	22	28	42	55	110	210
max. allowable	145	145	145	320	320	700	700


- Stated values to be break-away torques without any consideration of safety factors for actuators.

Flow Rate Values Cv usg/min. ($K_v = C_v/1.16$)

Size DN	15/1/2"	20/3/4"	25/1"	40/1 1/2"	50/2"/3"	80/4"	100/6"
Full Port Valve	18	36	70	216	320	930	1'425

Option**Type Fb**

Fugitive emission bonnet according to TA-Luft (VDI 2440), incl. leak detection port for environmentally safe operation

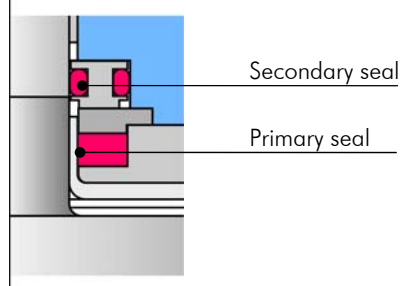**Typical Service Applications**


- Chemical CPI
- Petro-Chemical
- Bio-Technical
- Pharmaceutical Industry
- Semi-Conductors
- Pulp and Paper
- Food Processing
- Paint and Pigments
- Fertilizers
- Textile Industry
- Mining and Steel



Control Valves with V-Port Cylinder

for effective flow control – under severe operating conditions!

Sectional View

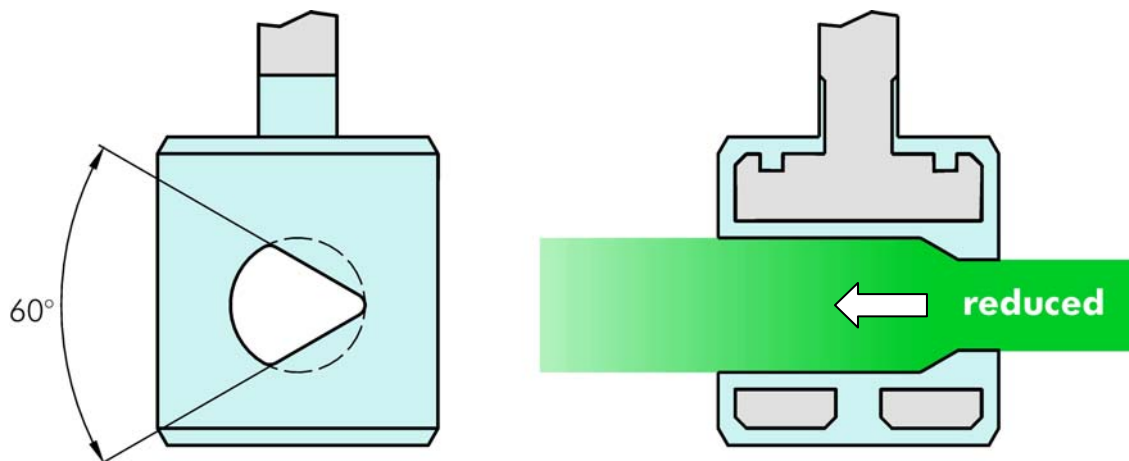

Cv Values

in usg/min

Size DN	Opening angle of cylinder					
mm/inch	15°	30°	45°	60°	75°	90°
15/1/2"	0	0	0	0.35	5.2	8.1
20/3/4"	0	0	0.6	3	10.7	21.1
25/1"	0	0	1.3	4.5	18.9	31
40/1 1/2"	0	1.4	7.3	13.3	30.9	106
50/2"	0	3	9.7	19	42	124
80/3"red	0	3	9.7	19	42	124
100/4"red						352
6"red						549

Size 3", 4" and 6" with reduced port to 50, 80 resp. 100 mm

Kv Values


in m³/h

Size DN	Opening angle of cylinder					
mm/inch	15°	30°	45°	60°	75°	90°
15/1/2"	0	0	0	0.3	4.5	7
20/3/4"	0	0	0.5	2.6	9.2	18.2
25/1"	0	0	1.1	3.9	16.3	26.7
40/1 1/2"	0	1.2	6.3	11.5	26.6	91
50/2"	0	2.6	8.4	16.4	36.2	107
80/3"	0	2.6	8.4	16.4	36.2	107
100/4"red						303
6"red						473

Size 3", 4" and 6" with reduced port to 50, 80 resp. 100 mm



Standard Version (Picture showing Valve 2"-150lbs, PFA liner, PFA-encapsulated cylinder, bare shaft)

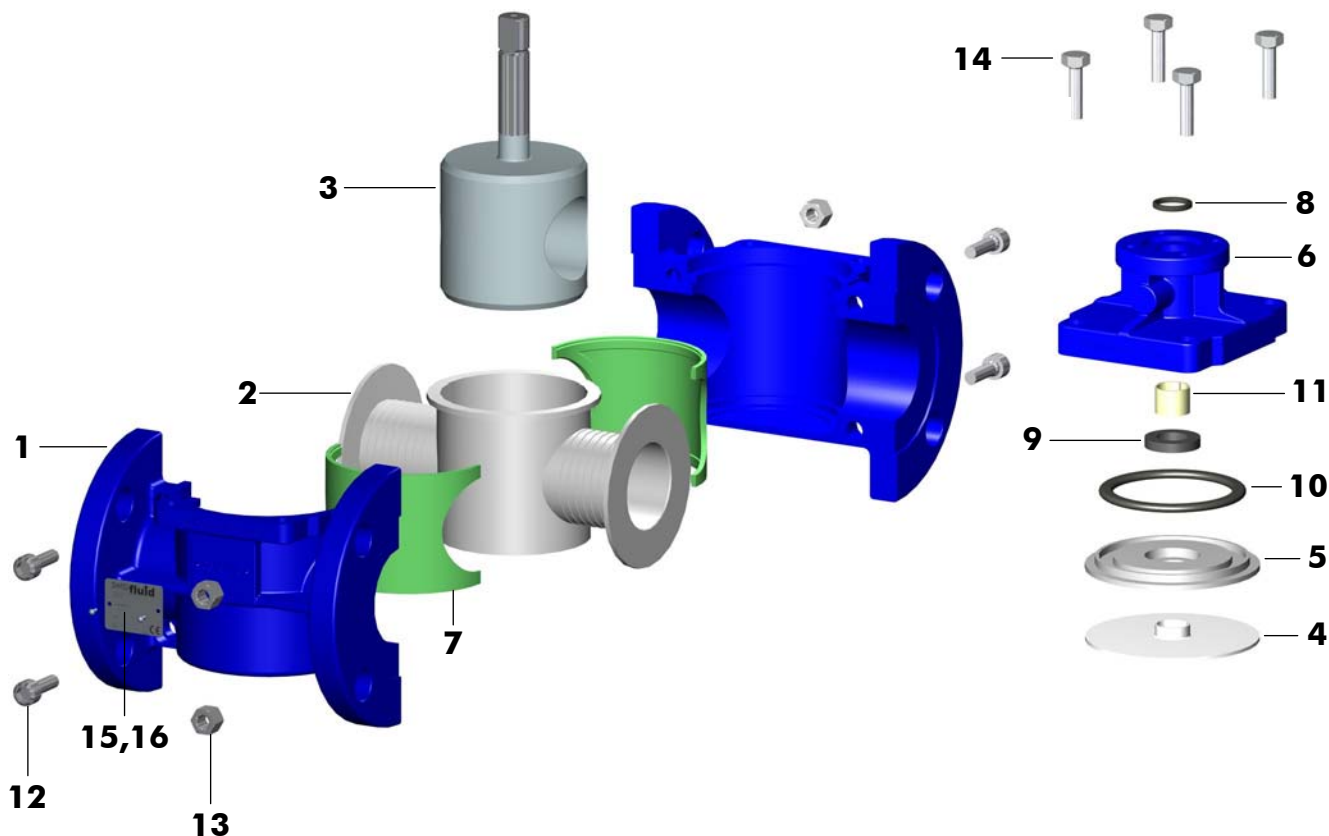

Item	Qty.	Description	Material	No.
1	1	Body two-piece, RAL 5005	WCB	1.0619
2	1	Liner	PFA	
3	1	Cylinder encapsulated	Duplex/PFA	1.4462
4	1	Diaphragm	PTFE	
5	1	Pressure Plate	CF-8M	1.4408
6	1	Bonnet, RAL 5005	WCB	1.0619
7	2	Elastomer	VMQ	
8	1	O-Ring top	FPM	
9	1	Shaft Seal Ring	VMQ	
10	1	Round Gasket	FPM	
11	1	Bearing DU	C.Steel/PTFE	
12	4	Socket Head Cap Screw	A2-70	1.4310
13	4	Hex. Nut	A2-70	1.4310
14	4	Hex. Head Screw	A2-70	1.4310
15	1	Name Plate 42 x 14 CE	A2	1.4301
16	2	Hammer Screw 2.49 x 4.76	A2	1.4310



Project-/Customer Data		Inquiry/Date: _____	Ref. Swissfluid
Company: _____	Contact Person: _____	Phone: _____	
Address: _____	Function: _____	Fax: _____	
ZIP/Place: _____	Department: _____	E-mail: _____	
Project: _____	Phone direct: _____	Mobile: _____	

Operating Conditions**Media / Chemical Composition:**

☐ Liquid	☐ powdery	☐ crystallizing	☐ sticky	☐ Spez. Grav. ____
☐ gaseous	☐ Solids ____ %	☐ viscous	☐ Flow Velocity ____ m/s	
☐ abrasive	☐ Paricle ____ mm	☐ Visc. ____ cp	☐ Flow Rate ____ m ³ /h	

Pressure

max. ____ bar
min. ____ bar

Temperature

max. ____ °C
min. ____ °C

Mode

☐ On/Off
☐ Flow Control
____ cycles/ ____

Installation / Environment

☐ horizontal ☐ Room dry
☐ vertical ☐ Room humid
☐ outdoor

Remarks: _____

Specification of a complete Cylindrical Valve SCP Series

Size/ Nom. Press.	Flange Connection																																																																																						
SCP	-	-	-	-	-	-	-	-	-	-																																																																													
<table border="0"> <tr> <td>Body</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>G10</td> <td>Cast steel WCB (1.0619)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>G15</td> <td>Stainl. st. casting CF-8M (1.4408)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>											Body											G10	Cast steel WCB (1.0619)										G15	Stainl. st. casting CF-8M (1.4408)																																																					
Body																																																																																							
G10	Cast steel WCB (1.0619)																																																																																						
G15	Stainl. st. casting CF-8M (1.4408)																																																																																						
<table border="0"> <tr> <td>Liner</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>A80</td> <td>PFA</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>A81</td> <td>PFA-AS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>											Liner											A80	PFA										A81	PFA-AS																																																					
Liner																																																																																							
A80	PFA																																																																																						
A81	PFA-AS																																																																																						
<table border="0"> <tr> <td>Cylinder / Shaft</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>U85</td> <td>PFA/1.4462</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>U86</td> <td>PFA-AS/1.4462</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>U88</td> <td>PVDF/1.4462</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Z32</td> <td>1.4435</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Z40</td> <td>Titanium Gr.2</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Z43</td> <td>Hastelloy C-276</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>											Cylinder / Shaft											U85	PFA/1.4462										U86	PFA-AS/1.4462										U88	PVDF/1.4462										Z32	1.4435										Z40	Titanium Gr.2										Z43	Hastelloy C-276									
Cylinder / Shaft																																																																																							
U85	PFA/1.4462																																																																																						
U86	PFA-AS/1.4462																																																																																						
U88	PVDF/1.4462																																																																																						
Z32	1.4435																																																																																						
Z40	Titanium Gr.2																																																																																						
Z43	Hastelloy C-276																																																																																						
<table border="0"> <tr> <td>Elastomer</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>E67</td> <td>FPM (Viton®)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>E68</td> <td>VMQ (Silicone)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>											Elastomer											E67	FPM (Viton®)										E68	VMQ (Silicone)																																																					
Elastomer																																																																																							
E67	FPM (Viton®)																																																																																						
E68	VMQ (Silicone)																																																																																						
<table border="0"> <tr> <td>Shaft end / Actuator</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>DD</td> <td>Bare shaft, Double D</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>VK</td> <td>Bare shaft, square parallel</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>VV</td> <td>Bare shaft, square, 45° rot.</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>HH</td> <td>Handle</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>HG</td> <td>Manual gearbox</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>											Shaft end / Actuator											DD	Bare shaft, Double D										VK	Bare shaft, square parallel										VV	Bare shaft, square, 45° rot.										HH	Handle										HG	Manual gearbox																				
Shaft end / Actuator																																																																																							
DD	Bare shaft, Double D																																																																																						
VK	Bare shaft, square parallel																																																																																						
VV	Bare shaft, square, 45° rot.																																																																																						
HH	Handle																																																																																						
HG	Manual gearbox																																																																																						
<table border="0"> <tr> <td>Options</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Fb</td> <td>FEB Safety stuffing box</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>0000</td> <td>Special Paint (RAL-Code)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Vp</td> <td>V-Port Cylinder</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>W1</td> <td>Shaft extension 100 mm</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>											Options											Fb	FEB Safety stuffing box										0000	Special Paint (RAL-Code)										Vp	V-Port Cylinder										W1	Shaft extension 100 mm																															
Options																																																																																							
Fb	FEB Safety stuffing box																																																																																						
0000	Special Paint (RAL-Code)																																																																																						
Vp	V-Port Cylinder																																																																																						
W1	Shaft extension 100 mm																																																																																						

Automated Valves
 Actuator Specification acc. to
 PM 61 M.04 e