


MAX-AIR RACK & PINION ACTUATORS



Product Overview

UT Series Pneumatic Rotary Actuators

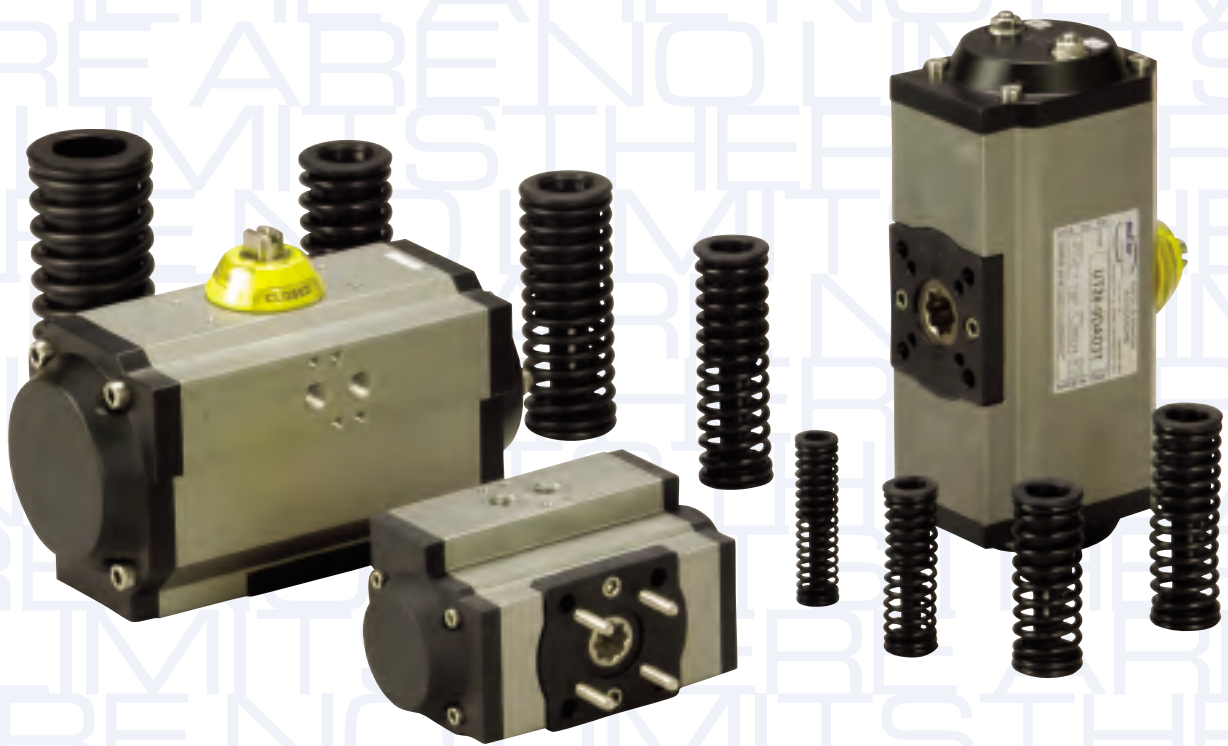

751 Hoff Road • O'Fallon, MO 63366 • Toll Free 1.888.842.9998

■ ■ ■ FEATURES

Compact Design

The MAX-AIR rack & pinion pneumatic actuator produces linear torque output in a compact design utilizing the same body and end caps for double acting and spring return units.

Namur Mounting

Namur VDI/DE 3845 and ISO 5211 dimensions on all sizes. No special blocks are required to mount solenoid valves, limit switches or positioners.

Degree of Travel

The standard angle of rotation is 90°. Additional travel rotations of 120°, 135°, 150° and 180° are available. For sizes from UT16 and larger, Max-Air features dual travel stops that provide for $\pm 10^\circ$ stroke registration on both the opening and closing phases of the actuator stroke. 110° of travel in a standard 90° actuator!

Flexible Output Shafts

The female pinion drive is standard with a double square output drive, and optional with a double-D drive, keyed drive and designs to meet your specific requirements.

High Cycle Bearings

Shaft bearings isolate the pinion gear from the housing and support the shaft for high cycle applications. Many competitive manufacturers do not provide this critical feature.

Rugged Tooth Design

The pinion teeth are engaged the full length and stroke of the piston. The pinion height allows manual override without disturbing the indicated positions.

High Visibility Position Indication

External open/close indicator as standard, available for all the rotations.

High Cycle Life Wear Pads

Pistons incorporate double wear pads to separate the rack from the actuator wall and serve as both guide and wear bearings.

Pre-Loaded Spring Cartridges

Epoxy coated special steel springs are pre-loaded with non-metallic materials. The stainless steel end cap fasteners are extra long to allow for spring relaxation. All parts are corrosion resistant.

Alternative Operating Media

Air pressure operation from 2 to 10 Bar (40 – 150 PSI). Water, nitrogen and compatible hydraulic fluids may also be used to power the actuator.

Stainless Steel Fasteners

All external fasteners are corrosion resistant stainless steel.

Honed Bore for High Cycle Life

Extruded aluminum body is internally machined and lapped to exact specifications. Honing prevents dry spots from forming within the actuator bore and therefore eliminates premature seal failure - a critical aspect to long cycle life. All internal and external surfaces are hard anodized for corrosion resistance, with all units permanently lubricated at the factory with non-silicone grease.

Traceability

All units are externally stamped with a progressive traceable serial number.

Quality Assurance

100% of all units are factory pressure and leak tested, and individually boxed for shipment.

Best Warranty in the Industry

Max Air products are covered by our unlimited cycle life warranty. Contact your representative for more details.


Accessories

Max-Air offers a wide range of adapters for many different types of valves, including BFV, BALL and PLUG types. Please call for details.



TORQUE TABLE SUMMARY


**TORQUE VALUES in In.Lbs
DOUBLE ACTING**

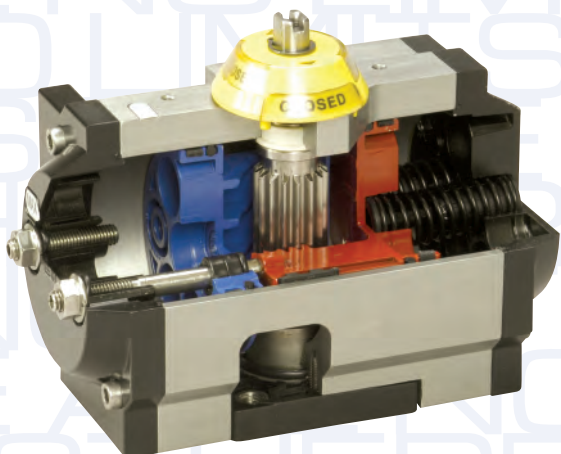


TYPE	40 PSIG	60 PSIG	80 PSIG	100 PSIG	120 PSIG
UT-11/12	62	94	125	156	187
UT-14/16	137	206	275	344	412
UT-17	180	270	360	450	540
UT-19/21	250	375	500	625	750
UT-26	375	562	750	937	1125
UT-31	500	750	1000	1250	1500
UT-36	800	1200	1600	2000	2400
UT-41	1000	1500	2000	2500	3000
UT-46	1562	2344	3125	3906	4687
UT-51	2250	3375	4500	5625	6750
UT-56	3000	4500	6000	7500	9000
UT-61	4550	6825	9100	11375	13650
UT-66	6000	9000	12000	15000	18000
UT-71	11750	17625	23500	29375	35250
UT-76	15750	23625	31500	39375	47250

TORQUE TABLE HELP


DOUBLE ACTING

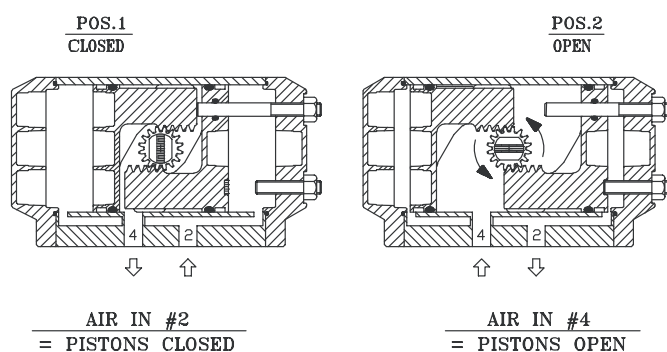

↑ = AIR IN ↓ = AIR OUT

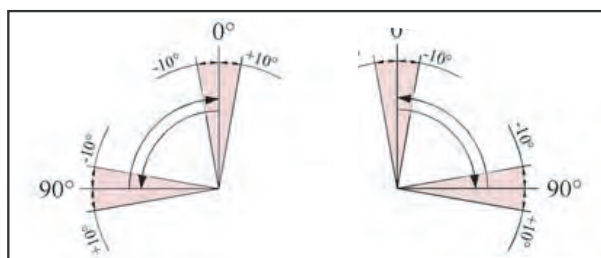

SPRING RETURN

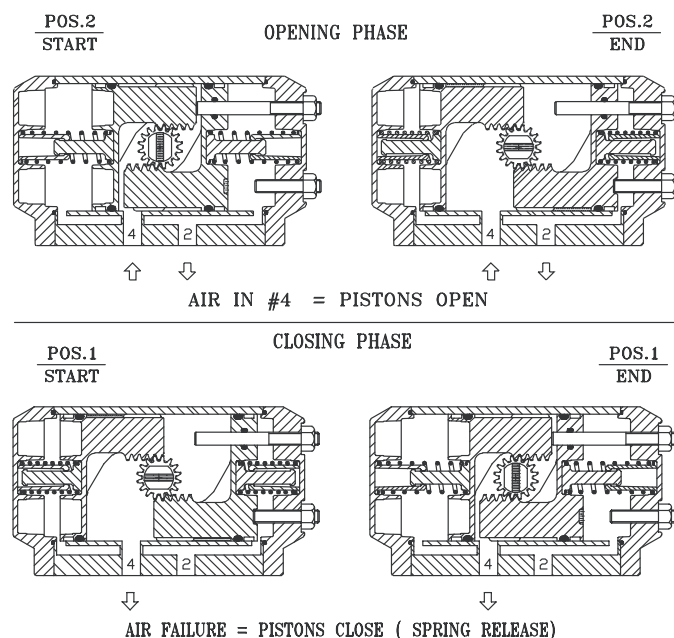



SPRING RETURN UT-11 - UT-46


		POS. 1 CLOSING TORQUE (SPRING)		POS. 2 – OPENING TORQUE									
				40 PSIG		60 PSIG		80 PSIG		100 PSIG		120 PSIG	
		# SPRINGS		START	END	START	END	START	END	START	END	START	END
UT-11/12	1+1	33	22	40	29	72	61	103	92	134	123	165	154
	2+2	66	44	--	--	50	28	81	59	112	90	143	121
	3+3	99	66	--	--	--	--	58	27	90	66	121	88
UT-14/16	2+2	75	53	84	62	153	131	222	200	291	269	359	337
	3+3	112	81	56	25	125	94	194	163	263	232	331	300
	4+4	150	107	--	--	99	56	168	125	237	194	305	262
	5+5	187	134	--	--	72	19	141	88	210	157	278	225
	7+5	224	160	--	--	--	--	115	51	184	120	252	188
UT-17	2+2	93	64	116	87	206	177	296	267	386	357	476	447
	3+3	139	96	84	41	174	131	264	221	354	311	444	401
	4+4	185	128	--	--	142	85	232	175	322	265	412	355
	5+5	232	160	--	--	110	38	200	128	290	218	380	308
	7+5	278	192	--	--	--	--	168	82	258	172	348	262
UT-19/21	2+2	122	92	158	128	283	253	408	378	533	503	628	628
	3+3	184	138	112	66	237	191	362	316	487	441	612	566
	4+4	245	184	66	5	191	130	316	255	441	380	566	505
	5+5	307	230	--	--	145	68	270	193	395	318	520	443
	7+5	369	278	--	--	97	6	222	131	347	256	472	381
UT-26	2+2	196	124	251	179	438	366	626	554	813	741	1001	929
	3+3	294	185	190	81	377	268	565	456	752	643	940	831
	4+4	392	247	--	--	315	170	503	358	690	545	878	733
	5+5	490	309	--	--	253	72	441	260	628	447	816	635
	7+5	588	372	--	--	--	--	378	162	565	349	753	537
UT-31	2+2	251	187	313	249	563	499	813	749	1063	999	1313	1249
	3+3	376	280	220	124	470	374	720	624	970	874	1220	1124
	4+4	502	374	--	--	376	248	626	498	876	748	1126	998
	5+5	627	467	--	--	283	123	533	373	783	623	1033	873
	7+5	753	560	--	--	--	--	440	247	690	497	940	747
UT-36	2+2	412	306	494	388	894	788	1294	1188	1694	1588	2094	1988
	3+3	617	461	339	183	739	583	1139	983	1539	1383	1939	1783
	4+4	824	614	--	--	586	376	986	776	1396	1176	1786	1576
	5+5	1029	767	--	--	433	171	833	571	1233	971	1633	1371
	7+5	1236	921	--	--	--	--	679	364	1079	764	1479	1164
UT-41	2+2	505	371	629	495	1129	995	1629	1495	2129	1995	2629	2495
	3+3	757	556	444	243	944	743	1444	1243	1944	1743	2444	2243
	4+4	1011	741	--	--	759	489	1259	989	1759	1489	2259	1989
	5+5	1263	929	--	--	572	237	1072	737	1572	1237	2072	1737
	7+5	1516	1113	--	--	--	--	887	484	1387	984	1887	1484
UT-46	2+2	890	560	1002	672	1784	1454	2565	2235	3346	3016	4127	3797
	3+3	1334	840	722	228	1504	1010	2285	1791	3066	2572	3847	3353
	4+4	1779	1120	--	--	1224	565	2005	1346	2786	2127	3567	2908
	5+5	2224	1399	--	--	945	120	1726	901	2507	1682	3288	2463
	7+5	2669	1679	--	--	--	--	1446	456	2227	1237	3008	2018

* Actuator drawings may be downloaded at www.maxairtechnology.com/technicaldata/

	# SPRINGS	POS. 1 CLOSING TORQUE (SPRING)		POS. 2 – OPENING TORQUE									
		START	END	40 PSIG		60 PSIG		80 PSIG		100 PSIG		120 PSIG	
				START	END	START	END	START	END	START	END	START	END
UT-51	2+2	1101	869	1381	1149	2506	2274	3631	3399	4756	4524	5881	5649
	3+3	1652	1304	946	598	2071	1723	3196	2848	4321	3973	5446	5098
	4+4	2203	1738	512	47	1637	1172	2762	2297	3887	3422	5012	4547
	5+5	2754	2173	--	--	1202	621	2327	1749	3452	2871	4577	3996
	7+5	3303	2607	--	--	768	72	1893	1197	3018	2322	4143	3447
UT-56	2+2	1487	1055	1945	1513	3445	3013	4945	4513	6445	6013	7945	7513
	3+3	2231	1583	1417	769	2917	2269	4417	3769	5917	5269	7417	6769
	4+4	2974	2111	889	26	2389	1526	3889	3026	5389	4526	6889	6026
	5+5	3718	2638	--	--	1862	782	3362	2282	4862	3782	6362	5282
	7+5	4462	3166	--	--	1334	38	2834	1538	4334	3038	5834	4538
UT-61	2+2	2146	1711	2839	2404	5114	4679	7389	6954	9664	9229	11939	11504
	3+3	3220	2566	1984	1330	4259	3605	6534	5880	8809	8155	11084	10430
	4+4	4293	3422	1128	257	3403	2532	5678	4807	7953	7082	10228	9657
	5+5	5366	4277	--	--	2548	1459	4823	3734	7098	6009	9373	8284
	7+5	6438	5133	--	--	1692	387	3967	2662	6242	4937	8517	7212
UT-66	2+2	2810	2084	3916	3190	6916	6190	9916	9190	12916	12190	15916	15190
	3+3	4215	3126	2874	1785	5874	4785	8874	7785	11874	10785	14874	13785
	4+4	5619	4269	1831	381	4831	3381	7831	6381	10831	9381	13831	12381
	5+5	7024	5211	--	--	3789	1976	6789	4976	9789	7976	12789	10976
	7+5	8430	6252	--	--	--	--	5748	3570	8748	6570	11748	9570
UT-71	1+1	2123	1534	10216	9627	16091	15502	21966	21377	27841	27252	33716	33127
	2+2	4247	3068	8682	7503	14557	13378	20432	19253	26307	25128	32182	31003
	3+3	6370	4602	7148	5380	13023	11255	18898	17130	27773	23005	30648	28880
	4+4	8493	6136	5614	3257	11489	9132	17364	15007	23239	20882	29114	26757
	5+5	10617	7670	--	--	9955	7008	15830	12883	21705	18758	27580	24633
	6+6	12740	9204	--	--	8421	4885	14296	10760	20171	16635	26046	22510
	7+7	14863	10737	--	--	--	--	12763	8637	18638	14512	24513	20387
	8+8	16987	12271	--	--	--	--	11229	6513	17104	12388	22979	18263
UT-76	1+1	2843	1784	13966	12907	21841	20782	29716	28657	37591	36532	45466	44407
	2+2	5686	3569	12181	10064	20056	17939	27931	25814	35806	33689	43681	41564
	3+3	8530	5353	10397	7220	18272	15095	26147	22970	34022	30845	41897	38720
	4+4	11373	7137	8613	4377	16488	12252	24363	20127	32238	28002	40113	35877
	5+5	14216	8922	--	--	14703	9409	22578	17284	30453	25159	38328	33034
	6+6	17059	10706	--	--	12919	6566	20794	14441	28669	22316	36544	30191
	7+7	19902	12490	--	--	--	--	19010	11598	26885	19473	34760	27348
	8+8	22746	14275	--	--	--	--	17225	8754	25100	16629	32975	24504


* Actuator drawings may be downloaded at www.maxairtechnology.com/technicaldata/

MATERIALS

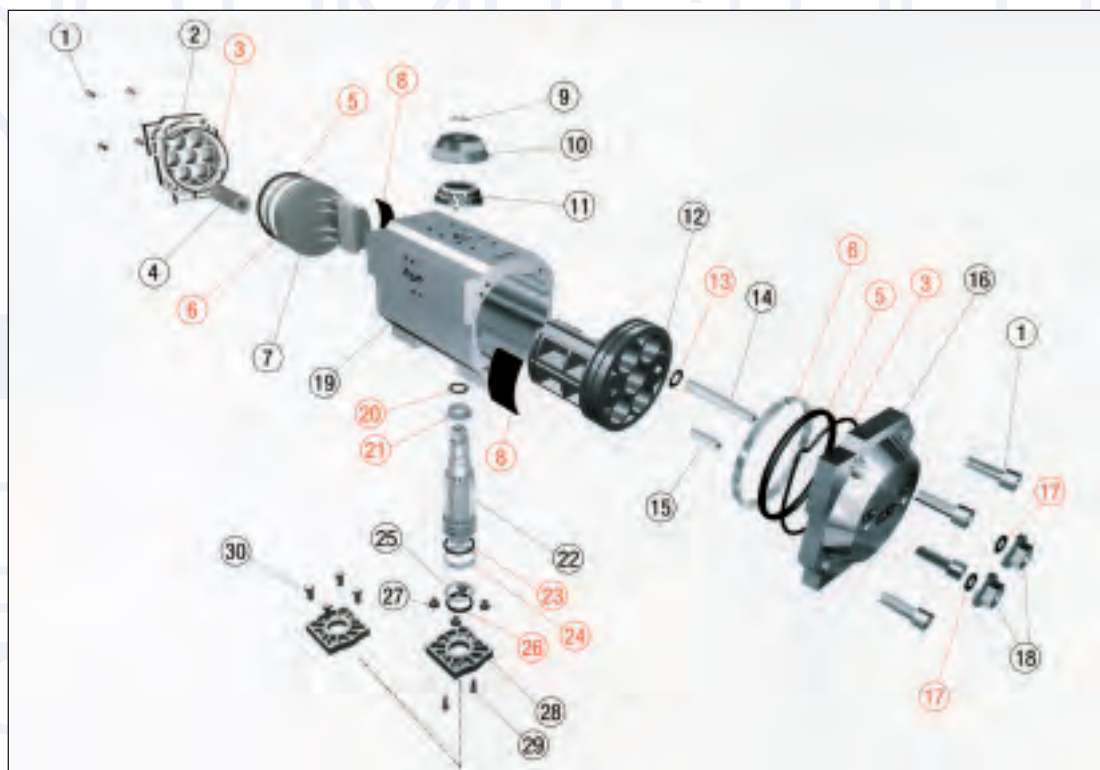

LEGEND: * = Techno-polymer thru UT16, die cast aluminum for larger sizes
 ** = Techno-polymer thru UT31, die cast aluminum for larger sizes
 Items in red are wear parts.

ITEM	DESCRIPTION	MATERIALS	ITEM	DESCRIPTION	MATERIALS
1	End Cap Screw	AISI 304 Stainless Steel	16	Right End Cap	Die Cast Aluminum
2	Left End Cap	*	17	Washer	AISI 304 Stainless Steel
3	End Cap O-Ring	BUNA-N	18	Stop Bolt Nut	AISI 304 Stainless Steel
4	Spring Cartridge	Spring Steel Epoxy Coated	19	Actuator Body	Extruded Aluminum ASTM B210 (6063)
5	Piston O-Ring	BUNA-N	20	Upper Pinion O-Ring	BUNA-N
6	Guide Ring	Techno-Polymer	21	Upper Pinion Bearing	Techno-Polymer
7	Left Piston	*	22	Pinion	ASTM A314 (303) Stainless Steel or SAE 11L14 Nickel Plated acc. ASTM B733
8	Piston Thrust Block	Techno-Polymer	23	Lower Pinion O-Ring	BUNA-N
9	Indicator Snap Ring	AISI 304 Stainless Steel	24	Lower Pinion Bearing	Techno-Polymer
10	Indicator (Rotating Part)	Techno-Polymer	25	Washer	Quenched and Tempered Steel
11	Indicator (Fix Part)	Techno-Polymer	26	Nuts	AISI 304 Stainless Steel
12	Right Piston	*	27	Flange	**
13	Stop Bolt O-Ring	BUNA-N	28	Flange Screws	AISI 304 Stainless Steel
14	Internal Reg. Screw	AISI 304 Stainless Steel	29	Bolts (optionals)	AISI 304 Stainless Steel
15	Stop Bolt	AISI 304 Stainless Steel			

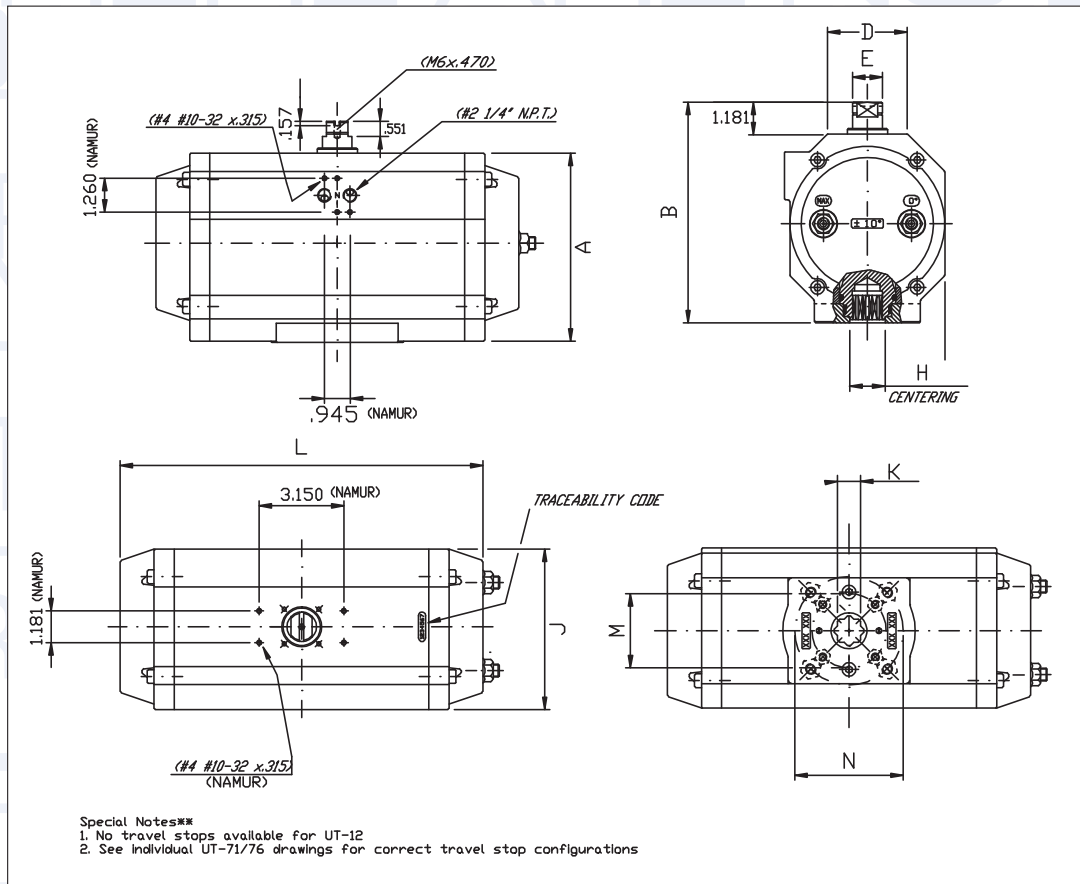

DIMENSIONS (inches)									FLANGES		Double-Acting		Spring-Return	
SIZE	A	B	D	E	H	J	K	L	STANDARD (dim M,N)	OPTIONAL (dim M,N)	WEIGHT (lbs)	AIR CONSUMPTION (cu.-in.)	WEIGHT (lbs)	AIR CONSUMPTION (cu.-in.)
UT-12	2.760	3.976	1.850	0.475	0.886	2.638	0.433	4.685	F04	F03	1.87	13.5	2.06	8.0
UT-16	3.543	4.764	1.693	0.472	1.300	3.346	0.551	6.496	F05	F04/F07/3.25'	4.03	25.6	4.45	11.2
UT-17	3.543	4.764	1.693	0.472	1.300	3.346	0.551	7.756	F05	F04/F07/3.25'	5.18	34.3	5.71	15.6
UT-21	4.409	5.630	1.811	0.551	1.300	3.780	0.670	6.969	F07	F04/F05/3.25'	6.33	44.4	7.16	18.1
UT-26	4.409	5.630	1.811	0.768	1.300	3.780	0.670	9.409	F07	F04/F05/3.25'	8.82	68.7	9.96	30.0
UT-31	5.157	6.378	2.283	0.768	1.300	4.450	0.670	9.055	F07	F04/F05/3.25'	10.67	88.9	12.28	40.6
UT-36	6.496	7.717	2.598	0.768	1.340	5.433	0.866	9.685	F07+F10	F12/3.25'/5.00'	16.71	153.1	19.88	75.0
UT-41	6.496	7.717	2.598	1.102	1.340	5.433	0.866	11.417	F07+F10	F12/3.25'/5.00'	19.91	190.6	23.61	100.0
UT-46	6.969	8.189	2.953	1.102	1.340	5.945	0.866	13.819	F07+F10	F12/3.25'/5.00'	27.47	275.0	33.11	115.6
UT-51	8.543	9.764	4.016	1.102	1.969	7.283	1.063	14.213	F12	F10	39.24	425.0	49.89	181.3
UT-56	8.543	9.764	4.016	1.102	1.969	7.283	1.063	16.457	F12	F10	48.90	565.5	59.53	256.3
UT-61	10.787	12.008	5.157	1.102	2.362	9.252	1.417	17.480	F14	F12/F10	80.03	881.3	101.19	343.8
UT-66	10.787	12.008	5.157	1.102	2.362	9.252	1.417	19.764	F14	F12/F10	94.36	1037.5	115.52	443.8
UT-71	13.071	14.252	6.299	1.102	4.134	13.071	1.811	23.110	F16	F14	147.27	1693.8	182.89	600.0
UT-76	13.071	14.252	6.299	1.102	5.512	13.071	1.811	26.654	F16	--	179.90	1962.5	216.05	731.3

*UT71 and UT76 have 2 Limit Switch Mounting options (80x30x30)mm & (130x30x30)mm

Max-Air TECHNOLOGY...



The Best Way To Automate Your Process



Available At:
Bay Port Valve & Fitting, Inc.

P.O. Box 315 Phone: (863) 425-0023
2295 S.R. 37 South (800) 369-0194
Mulberry, FL. 33860 Fax: (863) 425-5091
www.bayportvalve.com